

VIA ARTiGO A2000 WiFi Kit Installation Guide



Image maybe different from actual product

- 1) Mount: Locate the WiFi screw hole beside the motherboard and mount the WiFi module in place.
- 2) Connect the USB cable: the black end connects with the 2mm pitch adapter (narrow header), and then connect it to the motherboard USB pin header. The white end connects to the WiFi module. Next, connect both black ground wires to any mounting screw on the chassis (i.e.. Motherboard or hard drive screw hole).
- 3) Connect the pigtail: connect the tiny gold connector to the center gold header on the WiFi module. It is important to connect to the center gold header as it is the primary one, the gold header at the side is secondary and only for dual antenna purposes. Next, route the end of the pigtail to the back of the chassis and connects the antenna through the back antenna hole.
- 4) Setting: Check the BIOS setting and ensure the USB port is enabled.
- 5) Driver: Software driver is available at VIA support website at www.viaarena.com under Support > Drivers section. Please select your corresponding operating system, the WiFi module driver is under Ethernet (Networking/LAN/WLAN). The software you need is for VIA VT6656 WLAN controller. Install the driver and your WiFi feature is completed.



Image maybe different from actual product

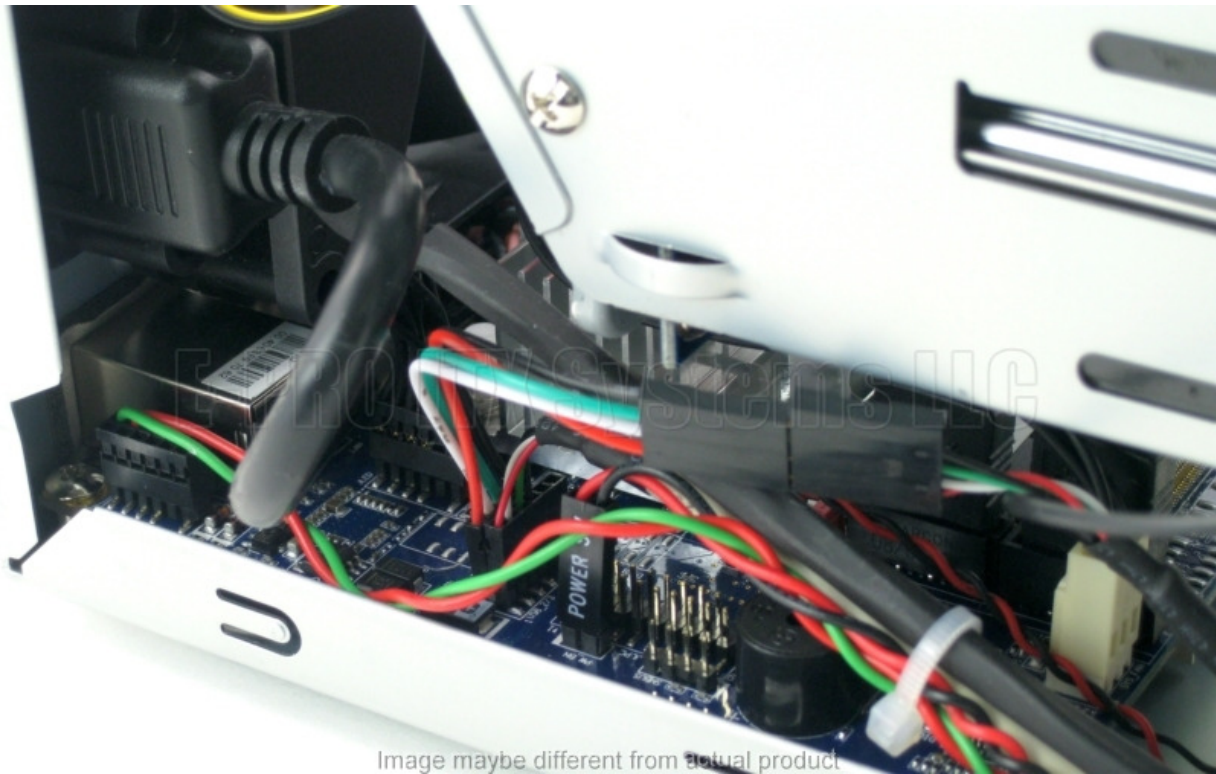


Image maybe different from actual product



Image maybe different from actual product

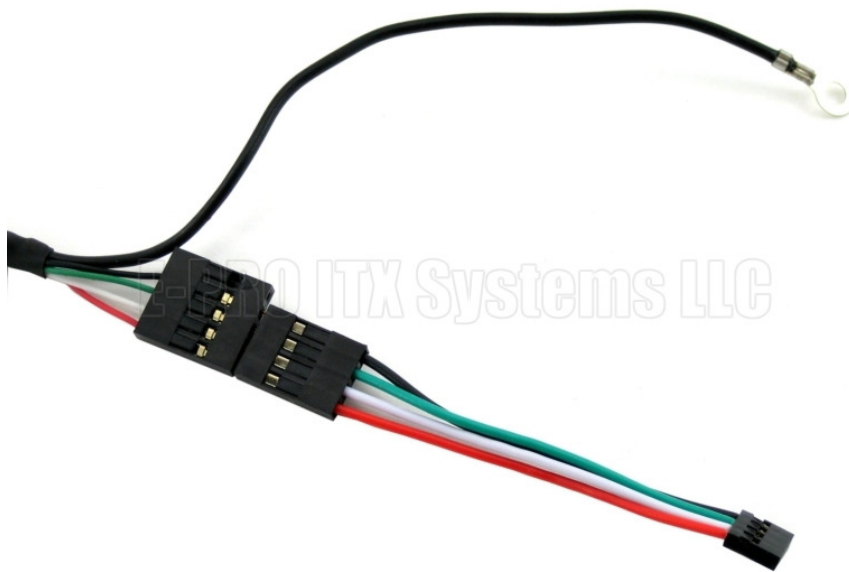


Image maybe different from actual product



Image maybe different from actual product



Image maybe different from actual product



Image maybe different from actual product