



VNT6656GEV00

USB MINICARD MODULE SPEC

Revision 1.6
July 17, 2007

VIA TECHNOLOGIES, INC.

Copyright Notice:

Copyright © 2007, VIA Technologies, Incorporated. All Rights Reserved.

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise without the prior written permission of VIA Technologies, Incorporated.

VNT6656GEV00 may only be used to identify WLAN products of VIA Technologies, Inc.



is a registered trademark of VIA Technologies, Incorporated.

All trademarks are the properties of their respective owners.

Disclaimer Notice:

No license is granted, implied or otherwise, under any patent or patent rights of VIA Technologies Inc. VIA Technologies Inc. makes no warranties, implied or otherwise, in regard to this document and to the products described in this document. The information provided by this document is believed to be accurate and reliable as of the publication date of this document. However, VIA Technologies Inc. assumes no responsibility for any errors in this document. Furthermore, VIA Technologies Inc. assumes no responsibility for the use or misuse of the information in this document and for any patent infringements that may arise from the use of this document. The information and product specifications within this document are subject to change at any time, without notice and without obligation to notify any person of such change.

Offices:

USA Office:

940 Mission Court
Fremont, CA 94539
USA
Tel: (510) 683-3300
Fax: (510) 683-3301 or (510) 687-4654
Web: www.viatech.com

Taipei Office:

8th Floor, No. 533
Chung-Cheng Road, Hsin-Tien
Taipei, Taiwan ROC
Tel: (886-2) 2218-5452
Fax: (886-2) 2219-8461
Web: www.via.com.tw



Revision History

| Release | Date | Revision | Initials |
|---------|------------|--|----------|
| 1.0 | 2006-09-08 | Initial Release | RTW |
| 1.1 | 2006-12-08 | To modify the power consumption data | RTW |
| 1.2 | 2007-01-10 | To add the mechanical drawing | RTW |
| 1.3 | 2007-01-24 | To add the antenna kits list; Hardware information | RTW |
| 1.4 | 2007-03-05 | To modify the 11b criteria | RTW |
| 1.5 | 2007-06-05 | To modify the operating temperature conditions | TP |
| 1.6 | 2007-07-17 | To add the LED Status | AK |

Table of Contents

| | |
|--|-----------|
| 1.0 Scope | 1 |
| 1.1 Document..... | 1 |
| 1.2 Product Features..... | 1 |
| 2.0 Requirements | 2 |
| 2.1 Functional Block Diagram..... | 2 |
| 2.2 General Requirements | 3 |
| 2.2.1 IEEE 802.11b Section | 3 |
| 2.2.2 IEEE 802.11g Section | 3 |
| 2.2.4 General Section | 5 |
| 2.3 Software Requirements | 6 |
| 2.3.1 Information | 6 |
| 2.3.2 Configuration..... | 6 |
| 2.3.3 Security | 7 |
| 2.4 Mechanical Requirements | 7 |
| 2.4.1 Information | 7 |
| 2.4.2 Mechanical Drawing | 8 |
| 2.5 Requirements of Reliability, Maintainability and Quality | 8 |
| 2.6 Environmental Requirements | 8 |
| 2.7 Module Pin Definition and Schematic Suggestion..... | 10 |
| 2.7.1 VNT6656GEV00..... | 10 |
| 2.8 Hardware Information | 11 |
| 2.8.1 PID/VID Information: | 11 |
| 2.8.2 HW Version:..... | 11 |
| 2.9 LED Status | 12 |
| 3.0 Appendix | 13 |
| 3.1 Compliance List of Antenna Kits..... | 13 |
| 3.2 FCC/CE DoC Document..... | 15 |

1.0 Scope

1.1 Document

This document is to specify the product requirements for **802.11 b/g** USB minicard module(Model No.: VNT6656GEV00). The USB minicard module is based on **VIA** MAC/BBP(VT6656) and VIA RFIC(VT6635) chip solution. The VNT6656GEV00 product complied with IEEE 802.11b/g standard from 2.4~2.5GHz, and it can be used to provide up to 11Mbps for IEEE 802.11b and 54Mbps for 2.4GHz IEEE 802.11g to connect your wireless LAN.

VNT6656GEV00 offers absolute interoperability with different vendors' 802.11b/g access points through the wireless LAN with seamless roaming, fully interoperability, and advanced security with WEP/WPA1.0/WPA2.0 standard.

1.2 Product Features

- Compatible with IEEE 802.11g standard to provide wireless 54Mbps data rate
- Compatible with IEEE 802.11b standard to provide wireless 11Mbps data rate
- Operation at 2.4 ~ 2.5GHz frequency band to meet worldwide regulations
- Dynamic data rate scaling at 6, 9, 12, 18, 24, 36, 48, 54Mbps for IEEE 802.11g
- Dynamic data rate scaling at 1, 2, 5.5, 11Mbps for IEEE 802.11b
- Maximum reliability, throughput and connectivity with automatic data rate switching
- Supports wireless data encryption with 64/128 bit WEP for security
- Supports infrastructure networks via Access Point and ad-hoc network via peer-to-peer communication
- Supports WPA enhanced security
- Friendly user configuration and utilities
- Drivers support Windows 98SE, ME, 2K, and XP

2.0 Requirements

The following sections identify the detailed requirements of the VNT6656GEV00

2.1 Functional Block Diagram

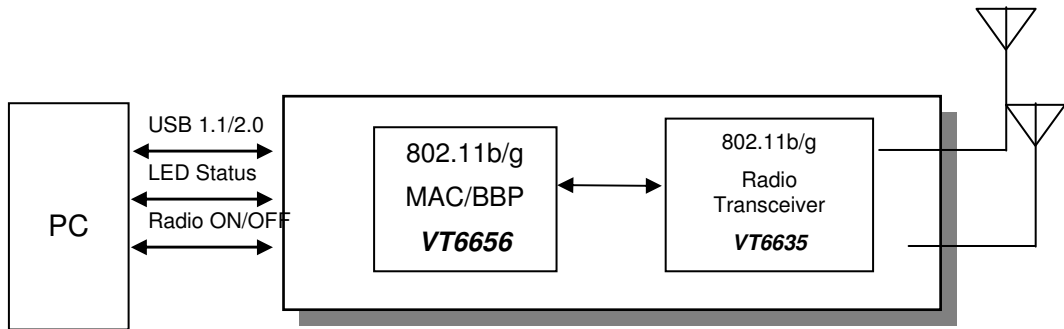


Fig. 2.1.1

2.2 General Requirements

2.2.1 IEEE 802.11b Section

| Item | Feature | Detailed Description |
|---------|------------------------------|---|
| 2.2.1.1 | Standard | <ul style="list-style-type: none"> IEEE 802.11b |
| 2.2.1.2 | Radio and Modulation Schemes | <ul style="list-style-type: none"> DQPSK, DBPSK, DSSS, and CCK |
| 2.2.1.3 | Operating Frequency | <ul style="list-style-type: none"> 2400 ~ 2483.5MHz ISM band |
| 2.2.1.4 | Channel Numbers | <ul style="list-style-type: none"> 11 channels for United States 13 channels for Europe/Japan Countries |
| 2.2.1.5 | Data Rate | <ul style="list-style-type: none"> 11, 5.5, 2, and 1Mbps |
| 2.2.1.6 | Media Access Protocol | <ul style="list-style-type: none"> CSMA/CA with ACK |
| 2.2.1.7 | Transmitter Output Power | <ul style="list-style-type: none"> Typical 15dBm at 11, 5.5, 2, and 1Mbps at room temperature 25 degree C |
| 2.2.1.8 | Receiver Sensitivity | <ul style="list-style-type: none"> Typical -83dBm for 11Mbps @ 8% PER |
| 2.2.1.9 | Throughput | <ul style="list-style-type: none"> At least 5.1Mbps@ 11Mbps link rate, ideal environment |

2.2.2 IEEE 802.11g Section

| Item | Feature | Detailed Description |
|---------|---------------------------|---|
| 2.2.2.1 | Standard | <ul style="list-style-type: none"> IEEE 802.11g |
| 2.2.2.2 | Radio and Modulation Type | <ul style="list-style-type: none"> BPSK, QPSK, 16QAM, 64QAM, OFDM |
| 2.2.2.3 | Operating Frequency | <ul style="list-style-type: none"> 2400 ~ 2483.5MHz ISM band |
| 2.2.2.4 | Channel Numbers | <ul style="list-style-type: none"> 11 channels for United States 13 channels for Europe/Japan Countries |
| 2.2.2.5 | Data Rate | <ul style="list-style-type: none"> 6, 9, 12, 18, 24, 36, 48, 54Mbps |
| 2.2.2.6 | Media Access Protocol | <ul style="list-style-type: none"> CSMA/CA with ACK |
| 2.2.2.7 | Transmitter Output Power | <ul style="list-style-type: none"> Typical RF Output Power at each Data Rate and at room Temp. 25degree C |



| Item | Feature | Detailed Description |
|---------|----------------------|---|
| | | <ul style="list-style-type: none">• 13dBm at 54Mbps |
| 2.2.2.8 | Receiver Sensitivity | <ul style="list-style-type: none">• Typical Sensitivity at Which Frame (1000-byte PDUs) Error Rate = 10%• -68dBm at 54Mbps |
| 2.2.2.9 | Throughput | <ul style="list-style-type: none">• At least 16Mbps@ 54Mbps link rate, ideal environment |

2.2.4 General Section

| Item | Feature | Detailed Description |
|---------|---------------------------|---|
| 2.2.4.1 | Antenna connector Type | <ul style="list-style-type: none">• Two(2) coaxial cable antenna connectors |
| 2.2.4.2 | Operating Voltage | <ul style="list-style-type: none">• 3.3 VDC +/- 10% |
| 2.2.4.3 | Power Consumption | <ul style="list-style-type: none">• 345 mA @ Tx mode/High speed• 320 mA @ Rx mode/High speed |
| 2.2.4.4 | Form Factor and Interface | <ul style="list-style-type: none">• USB 1.1/2.0 interface |

2.3 Software Requirements

The Configuration Software supports Microsoft Windows 98SE, ME, 2000, and XP. This configuration software includes the following functions:

- **Information**
Information allows you to monitor network status.
- **Configuration**
Configuration allows you to configure parameters for wireless networking.
- **Security**
Supports enhanced security WEP, WPA1.0/2.0.

2.3.1 Information

| Item | Feature | Detailed Description |
|---------|--------------------------|--|
| 2.3.1.1 | General Information | <ul style="list-style-type: none"> • General Information shows the name of Wireless Adapter, Adapter MAC Address, Regulatory Domain, Firmware Version, and Utility Version. |
| 2.3.1.2 | Current Link Information | <ul style="list-style-type: none"> • Current Link Information shows the Current Setting ESSID, Channel Number, Associated BSSID, Network Type (infrastructure or Ad-hoc network), WEP Status (enable or disable), Link Status (Connect or Dis-connect), 802.11g Transmit Speed (6, 9, 12, 18, 24, 36, 48, 54Mbps), 802.11b Transmit Speed (1, 2, 5.5, 11Mbps), Signal Strength, and Link Quality. |
| 2.3.1.3 | Site survey | <ul style="list-style-type: none"> • To search the neighboring access points and display the information of all access points. |

2.3.2 Configuration

| Item | Feature | Detailed Description |
|---------|--------------------|---|
| 2.3.2.1 | ESS ID | <ul style="list-style-type: none"> • Input an SSID number if the roaming feature is enabled • Supports for ASCII printable characters. |
| 2.3.2.2 | Network Type | <ul style="list-style-type: none"> • Ad-hoc Mode and 802.11 Ad-hoc Mode for network configurations that do not have any access points • Infrastructure Mode for network configurations with access points |
| 2.3.2.3 | Power Save | <ul style="list-style-type: none"> • Extend the battery life of clients by allowing the client to sleep for short periods of time while the Access Point buffers the messages |
| 2.3.2.4 | RTS Threshold | <ul style="list-style-type: none"> • Set the number of bytes used for fragmentation boundary for messages |
| 2.3.2.5 | Fragment Threshold | <ul style="list-style-type: none"> • Set the number of bytes used for RTS/CTS boundary |

| Item | Feature | Detailed Description |
|---------|---------|--|
| 2.3.2.6 | Roaming | <ul style="list-style-type: none"> Support Automatic or Manual Rescan to associate with access point. |

2.3.3 Security

| Item | Feature | Detailed Description |
|---------|----------------|---|
| 2.3.3.1 | Encryption | <ul style="list-style-type: none"> RC4 encryption algorithm Support 64/128 bit WEP encryption Support open system and shared key authentication |
| 2.3.3.2 | WEP Management | <ul style="list-style-type: none"> Four WEP keys can be selected STA with WEP off will never associate any AP with WEP enabled WEP Key Format: Option for Hex/ASCII format |
| 2.3.3.3 | 802.1x | <ul style="list-style-type: none"> Support EAP-TLS, EAP-TTLS, EAP-PEAP and LEAP |
| 2.3.3.4 | WPA | <ul style="list-style-type: none"> Support WPA-PSK and WPA-EAP Support Cipher Mode TKIP |

2.4 Mechanical Requirements


2.4.1 Information

| Item | Feature | Detailed Description |
|-------|---------|---|
| 2.4.1 | Length | <ul style="list-style-type: none"> 50.95mm |
| 2.4.2 | Width | <ul style="list-style-type: none"> 30mm |
| 2.4.3 | Height | <ul style="list-style-type: none"> 4.1mm |

2.4.2 Mechanical Drawing



VIA Wireless LAN PCIe Minicard
VN159C_Dimensions

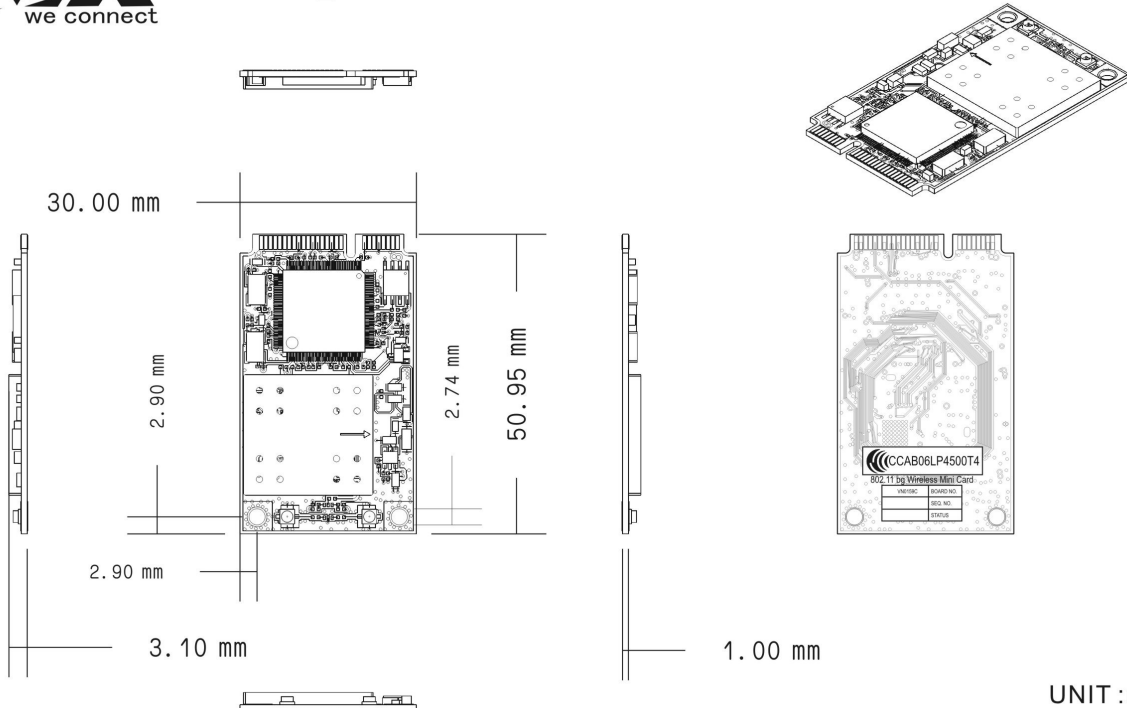

UNIT :mm
Size: A5
2007-01-10 v1.0

2.5 Requirements of Reliability, Maintainability and Quality

| Item | Feature | Detailed Description |
|-------|-----------------|--|
| 2.5.1 | MTBF | <ul style="list-style-type: none"> Mean Time Between Failure > 30,000 hours |
| 2.5.2 | Maintainability | <ul style="list-style-type: none"> There is no scheduled preventive maintenance required |
| 2.5.3 | Quality | <ul style="list-style-type: none"> The product quality is followed-up by VIA factory quality control system |

2.6 Environmental Requirements

| Item | Feature | Detailed Description |
|-------|----------------------------------|---|
| 2.6.1 | Operating Temperature Conditions | <ul style="list-style-type: none"> The product is capable of continuous reliable operation when operating in ambient temperature of 0 °C to +80°C. <p><Note> Ambient temperature in immediate (<0.635cm) environment of minicard.</p> |



| Item | Feature | Detailed Description |
|-------|--------------------------------------|---|
| 2.6.2 | Non-Operating Temperature Conditions | <ul style="list-style-type: none">Neither subassemblies is damaged nor the operational performance is degraded when restored to the operating temperature after exposing to storage temperature in the range of -20°C to $+75^{\circ}\text{C}$. |
| 2.6.3 | Operating Humidity conditions | <ul style="list-style-type: none">The product is capable of continuous reliable operation when subjected to relative humidity in the range of 10% and 90% non-condensing. |
| 2.6.4 | Non-Operating Humidity Conditions | <ul style="list-style-type: none">The product is not damaged nor the performance is degraded after exposure to relative humidity ranging from 5% to 95% non-condensing |

2.7 Module Pin Definition and Schematic Suggestion

2.7.1 VNT6656GEV00

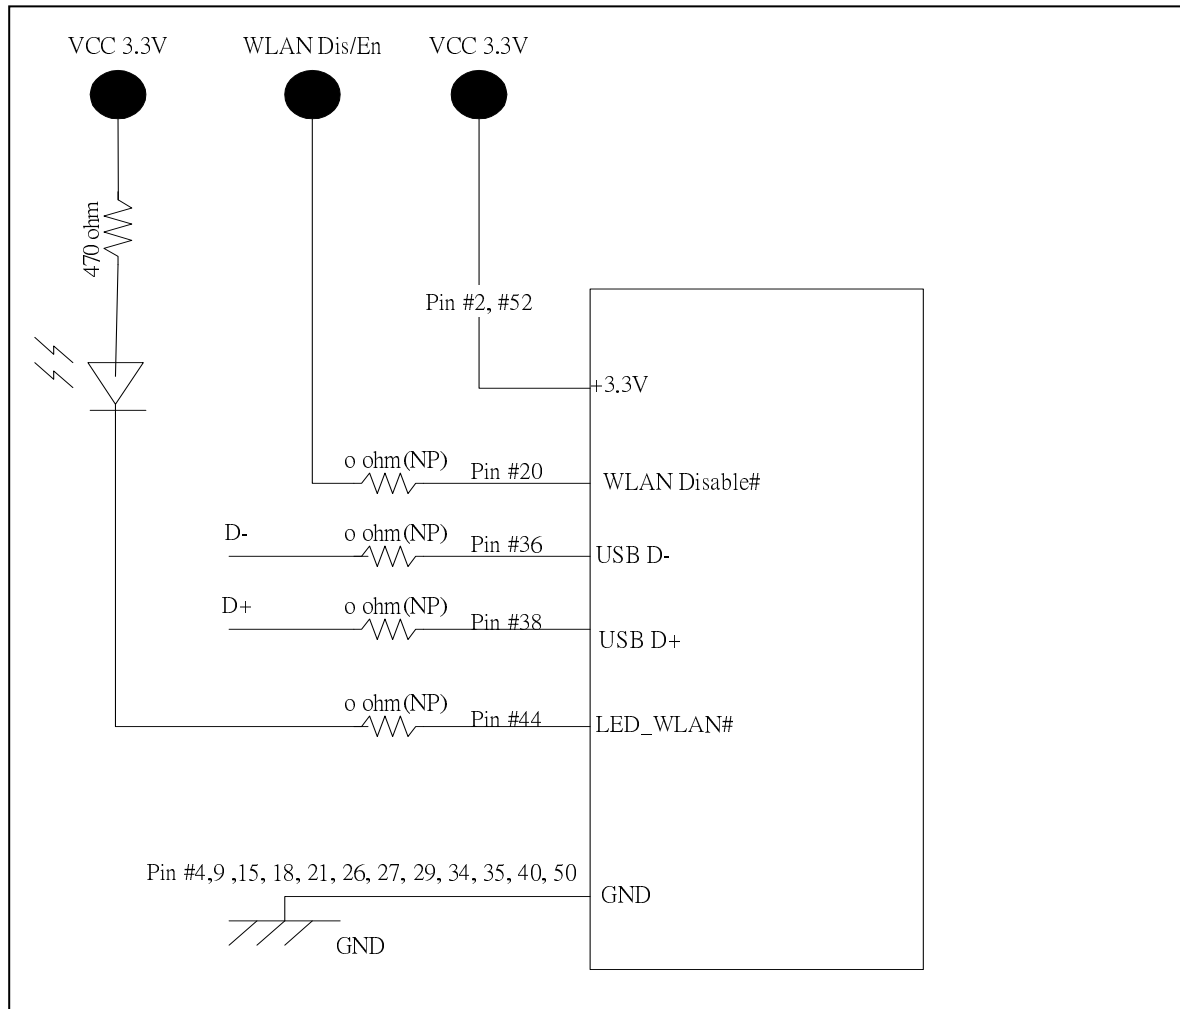


Fig. 2.7.1

Note:

1. When this design is adopted the USB WLAN mini-card, the resistors are put 0 ohm. While the design is adopted the PCI-E WLAN mini-card, the resistors are (NP).
2. If the co-layout design both adopted the "LED_WLAN#" and "WLAN Disable#" function, the 0 ohm of pin#20 and pin#44 could be omitted.



2.8 Hardware Information

2.8.1 PID/VID Information:

VID: 1106 ;PID: 3184

2.8.2 HW Version:

VN0159C

2.9 LED Status

| LED STATUS | DESCRIPTION | WLAN STATUS DEFINITION | characterization |
|----------------------|--|--|--|
| "OFF" | LED off | Not powered | |
| "ON" | LED stable on | Powered, associated, and authenticated but not Tx/ Rx | |
| "Slow blink" | LED flash at a steady but slow blink | Powered but not associated or authenticated; searching | 250+/-25%ms "ON" period; 0.2+/-25% Hz blink rate |
| "Intermittent Blink" | LED is flashing intermittently proportional to activity on the interface | Activity proportional to Tx/Rx speed | 50% duty cycle, 3Hz~20Hz blink rate |

3.0 Appendix

3.1 Compliance List of Antenna Kits

| No | Brand | Antenna report number | Antenna sample number | Type | Antenna Gain | Web Link | Web Link |
|----|-----------------------|-----------------------|-----------------------|---------|---------------|----------------------|---|
| 1 | FAVORTRON CO., LTD | 6-23-7M59K-021 | PIFA | IPX-MHF | 576mm±3mm | -0.01dBi (2.4GHz) | http://www.fvc.com.tw/ |
| 2 | FAVORTRON CO., LTD | 6-23-7M59K-011 | PIFA | IPX-MHF | 896mm±3mm | -0.97dBi (2.4GHz) | http://www.fvc.com.tw/ |
| 3 | VSO ELECTRIC CO., LTD | 13-130-F14911 | PIFA | IPX-MHF | 383mm±2mm | -4.4dBi (2.4GHz) | http://www.vso.com.tw |
| 4 | VSO ELECTRIC CO., LTD | 13-130-F14931 | PIFA | IPX-MHF | 398mm±3mm | -4.4dBi (2.4GHz) | http://www.vso.com.tw |
| 5 | VSO ELECTRIC CO., LTD | 13-130-F53021 | PIFA | IPX-MHF | Black 860±3mm | -6.03dBi (2.4GHz) | http://www.vso.com.tw |
| | | | | | Grey 1065±3mm | -3.37dBi (2.4GHz) | |
| 6 | VSO ELECTRIC CO., LTD | 13-130-F62011 | PIFA | IPX-MHF | 543mm±5mm | -0.22dBi (2.4GHz) | http://www.vso.com.tw |
| 7 | VSO ELECTRIC CO., LTD | 13-130-F62021 | PIFA | IPX-MHF | 688.5mm±5mm | -0.22dBi (2.4GHz) | http://www.vso.com.tw |
| 8 | VSO ELECTRIC CO., LTD | 14-211-F66021 | PIFA | IPX-MHF | 550mm±5mm | -0.31dBi (2.4GHz) | http://www.vso.com.tw |
| 9 | VSO ELECTRIC CO., LTD | 14-211-F66041 | PIFA | IPX-MHF | 570mm±5mm | -1.55dBi (2.4GHz) | http://www.vso.com.tw |
| 10 | FAVORTRON CO., LTD | K05008004451 | PIFA | IPX-MHF | 750mm±2mm | 0.79dBi (2.4GHz) | http://www.fvc.com.tw/ |
| 11 | FAVORTRON CO., LTD | K05008004351 | PIFA | IPX-MHF | 530mm±2mm | -0.80dBi (2.4GHz) | http://www.fvc.com.tw/ |
| 12 | FAVORTRON CO., LTD | K05008003651 | PIFA | IPX-MHF | 820mm±2mm | 0.74dBi (2.4GHz) | http://www.fvc.com.tw/ |



| | | | | | | | |
|----|---|------------------|------|---------|---------------|----------------------|---|
| 13 | FAVORTRON CO., LTD | K05008003751 | PIFA | IPX-MHF | 570mm±2mm | 0.18dBi (2.4GHz) | http://www.fvc.com.tw/ |
| 14 | FAVORTRON CO., LTD | K05004002251 | PIFA | IPX-MHF | Black 500±3mm | 2.80dBi (2.4GHz) | http://www.fvc.com.tw/ |
| | | | | | Grey 710±3mm | 1.68dBi (2.4GHz) | http://www.fvc.com.tw/ |
| 15 | FAVORTRON CO., LTD | K05004002351 | PIFA | IPX-MHF | Black 525±3mm | 0.93dBi (2.4GHz) | http://www.fvc.com.tw/ |
| | | | | | Grey 843±3mm | 1.26dBi (2.4GHz) | http://www.fvc.com.tw/ |
| 16 | Hon Hai Precision Industry Co.,Ltd (Brand:FOXCONN) | WDAN-U1L41001-DF | PIFA | IPX-MHF | Black 745±3mm | -1.38dBi (2.4GHz) | http://www.foxconn.com/about/introduction.aspx |
| | | | | | Grey 530±3mm | 0dBi (2.4GHz) | http://www.foxconn.com/about/introduction.aspx |
| 17 | Hon Hai Precision Industry Co.,Ltd (Brand:FOXCONN) | WDAN-U1L51002-DF | PIFA | IPX-MHF | Black 820±3mm | -1.99dBi (2.4GHz) | http://www.foxconn.com/about/introduction.aspx |
| | | | | | Grey 570±3mm | -1.4dBi (2.4GHz) | http://www.foxconn.com/about/introduction.aspx |

3.2 FCC/CE DoC Document

| | | | | | |
|--|--|------------------------------|---------------------|----------------------------|----------------------------|
| TCB | <p>GRANT OF EQUIPMENT AUTHORIZATION</p> <p>Certification</p> <p>Issued Under the Authority of the Federal Communications Commission</p> <p>By:</p> <p>American TCB, Inc. 6731 Whittier Avenue Suite C110 McLean, VA 22101</p> | TCB | | | |
| | Date of Grant: 01/10/2007 | | | | |
| | Application Dated: 01/10/2007 | | | | |
| <p>VIA Technologies, Inc. 8F, 533, Chung-Cheng Rd. Hsin-Tien, Taipei, Taiwan</p> <p>Attention: Dennis Chang , Manager</p> | | | | | |
| <p>NOT TRANSFERABLE</p> <p>EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is VALID ONLY for the equipment identified hereon for use under the Commission's Rules and Regulations listed below.</p> | | | | | |
| <p>FCC IDENTIFIER: NCI-VNT6656GEV0X</p> <p>Name of Grantee: VIA Technologies, Inc.</p> <p>Equipment Class: Digital Transmission System</p> <p>Notes: 802.11 BG Wireless Module</p> | | | | | |
| <u>Grant Notes</u> | <u>FCC Rule Parts</u> | <u>Frequency Range (MHZ)</u> | <u>Output Watts</u> | <u>Frequency Tolerance</u> | <u>Emission Designator</u> |
| | 15C | 2412.0 - 2462.0 | 0.177 | | |
| <p>Modular Approval. Power Output listed is conducted. Approval is limited to OEM installation only. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment must be installed and operated with the specified antennas listed in this report. OEM integrators must be provided with antenna installation instructions. OEM integrators and end-users must be provided with transmitter operation conditions for satisfying RF exposure compliance. This grant is valid only when the device is sold to OEM integrators and the OEM integrators are instructed to ensure that the end user has no manual instructions to remove or install the device.</p> | | | | | |



ISL *INTERNATIONAL STANDARDS LABORATORY*

No. 65, Ku Dai Keng St., Hsichih, Taipei 221, R.O. C. Tel: 886-2-2646-2550 FAX: 886-2-26464641
No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd. Lung-Tan Hsiang,
Tao Yuan County 325, Taiwan, R.O.C. Tel: 886-3-407-1718
FAX:886-3-407-1738

Certificate

Test Report No.: ISL-07LR001E328

Date: 2007/01/08

Product Name: 802.11 BG Wireless Module
Model Number(s): VNT6656GEV00
Responsible Party: VIA Technologies, Inc.
Address: 8F,533,Chung-Cheng Road
 Hsin-Tien,Taipei 23, Taiwan, R. O. C.
Contact Person: Dennis Chang

We, **International Standards Laboratory**, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in R&TTE Directive 99/5/EC. The device was passed the test performed according to :

ETSI EN300 328 V1.6.1: ERM; wideband transmission systems; data transmission equipment operating in the 2.4Ghz ISM band and using spread spectrum modulation techniques.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Eddy Hsiung/Director
International Standards Laboratory